


Model 928A Power System Multimeter™

Specifications subject to change without notice.

- **Low Cost**
- **0.1% Accuracy**
- **Power and Energy**
- **Flicker Per IEC 61000-4-15**
- **Harmonics I, V to 50th, THD**
- **Phase Angle I-I, V-V, I-V**
- **Waveform display**

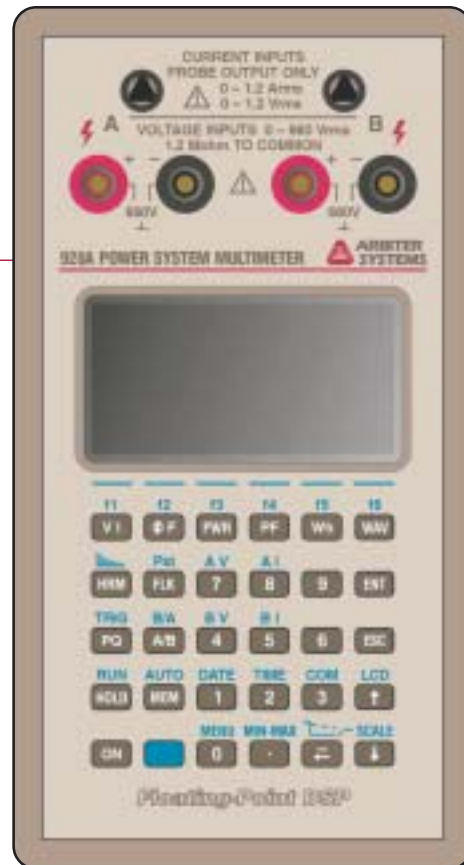

Built by Power Professionals, For Power Professionals

The Model 928A Power System Multimeter with *Floating-Point DSP™* Digital Signal Analysis is an AC Power measurement instrument, providing outstanding performance and flexibility in a small, hand-held package. Not only does the Model 928A measure basic data and power quantities, but it also measures power quality including harmonics, flicker, sags, surges and interruptions. Incorporating a graphic LCD display, serial communications, real time clock and an unprecedented combination of features makes the Model 928A the ideal instrument for the power professional.

Inputs

The Model 928A uses two identical input measurement channels capable of measuring either voltage or current. The dual inputs allow for voltage to current, voltage to voltage or current to current measurements with a basic accuracy of 0.1%. Note: an input CT is required for any current measurement and the basic accuracy of the Model 928A is affected by the accuracy of the input CT.

The flexible current inputs are compatible with both voltage output and current output CTs. Convenient current transformer calibration tables help eliminate errors introduced by the CTs and lessen their effect on system measurements. A special 0 to 40 mA range allows for accurate low level (< 10 mA) measurements.

Features

The Model 928A includes a bright, 128 x 64 graphic backlit LCD display, a 30-key multifunction keypad and USB 1.1 interface. The Model 928A may be powered either from four AA type cells (alkaline or NiMH) or an optional external, 6 Vdc plug-in power supply.

Accessories

The Model 928A requires an external CT for current measurements, such as the AS0071300 (1000:1) or the AS0071200 (100:1). Optional accessories include a tilt/bail handle, soft case, test leads, external 6 Vdc power supply, and other CTs.

Model 928A Specifications

Input

Input Configuration

The Arbiter Systems®, Inc. Model 928A Power System Multimeter™ has two identical measurement channels, Channel A and Channel B. Each input channel has a voltage input and a current input. Current inputs are intended for use with external CTs having a nominal output of 0 to 1 Arms or 0 to 1 Vrms. For basic measurements (voltage, current, frequency, and phase angle) any combination of inputs may be used. For power and energy measurements (active power, apparent power, reactive power, and power factor), one voltage and one current must be selected.

Voltage

Input Range	0 to 660 Vrms
Impedance	1.2 megohm, differential

Current

Input Range	0.01 to 1 Arms or 0.01 to 1.2 Vrms
Low range	to < 1 mA or 1 mV
Burden	0.01 ohm maximum (100 kohms nominal)

Interface

Operator Interface

Display	128 x 64 graphic LCD, backlit
Keyboard	30 key keypad
Serial	USB 1.1, Type B
Memory	512 kB flash
Data	User setups Real Time Clock Approx. 400 kB measurement data

Power Requirements

Batteries¹

Type	4 Type AA/LRG/AM3, Alkaline/NiCd/NiMH
Operation	30 hours typical with alkaline cells 60 hours typical with NiMH

External¹

Voltage	6 to 10 Vdc (11 Vdc maximum)
Current	< 100 mA
Connector	5.5 x 2.0 mm, center positive

Measurements

Voltage and Current

Method	Wideband: True rms, 3 kHz Bandwidth Narrowband: Fundamental magnitude
Accuracy	0.1% of reading (voltage) 0.1% of reading (current) 1% of reading (low current range)

Phase Angle, A-B

Range	0 to 360° or ±180°
Accuracy	0.1°
Underrange	< 1° typical

Frequency

Range	50 or 60 Hz ±5 Hz
Accuracy	0.005% of reading

Harmonics

Input	Channel A and Channel B, simultaneous
Range	2 nd to 50 th Harmonic (50 or 60 Hz fundamental)
Accuracy	0.1% THD +5% reading
Display	THD; K-factor; Amplitude bar graph; and individual harmonic magnitude and phase (simultaneous)

Waveform

Display	Channel A and/or Channel B
---------	----------------------------

Power / Energy Quantities

Range	0 to 99999 MVA or MVAh ±99999 MVAR or MVARh ±99999 MW or MWh ±1.0000 PF, lead or lag
Accuracy	0.1% of VA, for VA, VAR, and W 0.001 PF

¹ The batteries and the external wall-mount power supply are accessories and not included with the base Model 928A.

Model 928A Specifications

General

Physical

Size	196 x 101 x 38 mm (7.75 x 4 x 1.5 in.)
Weight	1 kg (2.2 lbs.), maximum

Environmental

Temperature	Operating: -10° to +50° C Nonoperating: -40° to +75° C
Humidity	Noncondensing

Accessories

Included

<u>Description</u>	<u>Order No.</u>
Operation Manual	PD0031600
Voltage Probe Lead Set	AP0009700

Available

<u>Description</u>	<u>Order No.</u>
100:1 Clamp-on CT, 100 A, with cable	AS0071200
1000:1 Clamp-on CT, 20 A, with cable	AS0071400
Flexible CT, with cable	AS0071500
Voltage Probe Lead Set	AP0009700
CT Cable, Current Output	CA0027100
CT Cable, Voltage Output	CA0027200
Soft Carrying Case	HD0065200
USB Data Cable, 6 ft	CA0026106
4-AA Alkaline cells	BT0000201
External power supply, +6 Vdc	AP0009400
Model 928A Starter Kit	AS0071800

Includes:

- 1 - AS0071200: 100:1 Clamp-on CT, 100 A, with cable
- 1 - AP0009700: Voltage Probe Lead Set
- 1 - AP0009400: External power supply, +6 Vdc
Requires power cord P01-P10 (see page 35)
- 1 - CA0026106: USB Data Cable, 6 ft
- 1 - BT0000201: 4-AA Alkaline cells
- 1 - HD0065200: Soft Carrying Case